



VP-8x8


8x8 Computer Graphics Video Matrix Switcher



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VP-8x8** is a high-performance matrix switcher for computer graphics video signals, with resolutions up to and exceeding UXGA on 15-pin HD connectors. It can route any or all inputs to any or all outputs simultaneously.

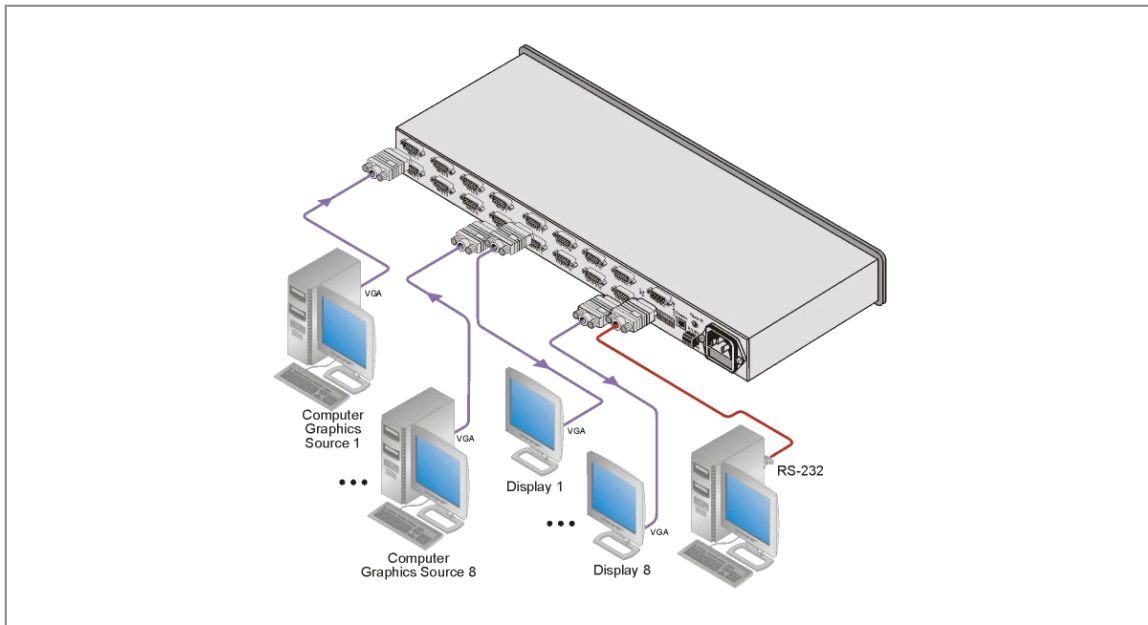



VP-8x8

FEATURES

- **High Bandwidth** - 400MHz (-3dB) fully loaded.
- **HDTV Compatible.**
- **Active Input Indication™ Reporting** - Each input button on the front panel automatically lights up when the unit detects a video signal on that input. When an input is selected to be switched, the button changes to a different color to indicate it is the active input.
- **Delayed Switching™** - Up to a 4sec (user selectable) delay for clean switching.
- **Flexible Control** - Front panel, RS-232 (K-Router™ Windows®-based Kramer software is included), RS-485, Ethernet & IR remote (included).
- **Front Panel Control Lockout.**
- **Take Button** - Executes multiple switches all at once.
- **Memory Locations** - Stores multiple switches as presets to be recalled and executed when needed.
- **Standard 19" Rack Mount Size** - 1U.

TECHNICAL SPECIFICATIONS

INPUT:	8 VGA on 15-pin HD connectors (VGA through UXGA).
OUTPUTS:	8 VGA on 15-pin HD connectors (VGA through UXGA).
MAX. OUTPUT LEVEL:	1.5Vpp.
BANDWIDTH (-3dB):	400MHz.
DIFF. GAIN:	0.04%.
DIFF. PHASE:	0.04Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	75dB.
CROSSTALK (all hostile):	-53dB.
CONTROLS:	22 front panel buttons, RS-232, RS-485, Ethernet.
COUPLING:	DC
POWER SOURCE:	100-240V AC, 50/60Hz; 23VA.
DIMENSIONS:	19" x 7" x 1U (W, D, H) rack mountable.
WEIGHT:	2.7kg (6lbs) approx.
ACCESSORIES:	Power cord, null-modem adapter, Windows®-based Kramer control software, infrared remote control transmitter.
OPTIONS:	External remote IR receiver cable.
OPTIONS:	External remote IR receiver cable.