

P42VHA30

42" colour plasma display monitor



Award-winning technology, working for you
Fujitsu General Limited is proud to present the new 42" plasma display monitor, which features a brand new cabinet design to perfectly match the home theatre environment. It is equipped with Fujitsu General Limited's exclusive AVM (Advanced Video Movement) Full Digital Video Processor to achieve the industry's highest picture quality, and we have incorporated our industry-leading technology into the new plasma display creating incredibly high brightness and high contrast. Combining the "Fine Mode" feature, which enables you to create cinema quality pictures, with the built-in D-class, 1-bit, delta-sigma spectrum digital amplifier, you can experience the image and sound quality of a movie theatre in your own home. With the inclusion of a wide variety of inputs, such as SCART and component, the new plasma display easily meets the demands of today's, and tomorrow's, various image sources.



FUJITSU

For a world without limits.

P42VHA30




specifications

POWER SOURCE	120V, 220 TO 240V AC, 50/60HZ	
POWER CONSUMPTION	U-TYPE (120V)	4.3A
	W/E/A-TYPE (220-240V)	1.8-1.5A
DISPLAY PANEL	TYPE	AC TYPE PLASMA DISPLAY PANEL
	SCREEN SIZE	921(H) X 518(V) mm DIAGONAL 42 INCHES
	ASPECT RATIO	16:9
	NUMBER OF PIXELS	852(H/RGB TRIO) X 480(V) PIXELS
	PIXEL PITCH	1.08mm X 1.08mm
	DISPLAYABLE COLOURS	1.07 BILLION
COLOUR SYSTEM	3.58NTSC, 4.43NTSC, PAL, PAL60, PAL-M, PAL-N, SECAM	
CONTROL	RS-232C	Dsub 9PIN(2 ROW TYPE: MALE)
DIMENSIONS	1,037(W) X 642(H) X 85*(D) mm *NOT INCLUDING PROJECTION PORTION	
WEIGHT	30KGS	
OPERATING CONDITIONS	TEMPERATURE	0°C - 40°C
	RELATIVE HUMIDITY	20% - 80%(NOT CONDENSING)
REGULATIONS	U-TYPE	SAFETY: UL6500, (C-UL)
		EMC: FCC CLASS B
	W/E/A-TYPE	SAFETY: IEC60065, EN60065 EMC: CISPR22, EN55022
BEZEL COLOUR	SILVER	

input/output

P42VHA30	
RGB INPUT	mDsub 15 PIN(3-ROW TYPE: MALE) X 1 SET
P42VHA30ES WITH OPTIONAL VIDEOBOARD P-TE1300	
RGB INPUT	mDsub 15 PIN(3-ROW TYPE: MALE) x 1 SET
VIDEO INPUT*	INCLUDED IN SCART TERMINAL
S-VIDEO INPUT*	INCLUDED IN SCART TERMINAL
COMPONENT VIDEO INPUT*	RCA-Pin x1 set
SCART INPUT*	SCART TERMINAL X 1 SET(VIDEO/S-VIDEO/RGB SELECTABLE)
AUDIO INPUT	RCA-PIN X 3 SETS(L/R)
AUDIO OUTPUT	EXTERNAL SPEAKER TERMINAL(12W+12W, 6Ω)

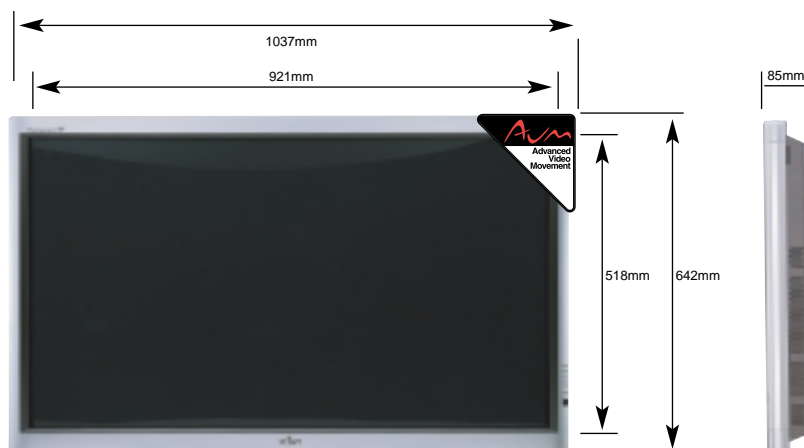

options

DESKTOP STANDS (S COLOUR)	P-TT4200-S
WALL MOUNTING BRACKET	P-WB4200-B
CEILING MOUNT BRACKET	P-CT4200-B
SPEAKER	P-SP4200-S
SPEAKER STAND	P-ST4200-S
VIDEOBOARD	P-TE1300

* ALSO AVAILABLE USING OPTIONAL ADAPTOR (P-AD4201-B)

WALL MOUNTING BRACKET	P-42WB12-B
CEILING MOUNT BRACKET	P-42CT11-B

- ATTENTION : DO NOT DISPLAY THE SAME PICTURE (PATTERN) FOR A LONG PERIOD OF TIME. THIS MAY CAUSE AFTER-IMAGES.
- THE PLASMA PANEL HAS BEEN BUILT USING EXTREMELY PRECISE AND SOPHISTICATED TECHNOLOGY; MORE THAN 99.99% OF ITS PIXELS ARE EFFECTIVE. HOWEVER, A MINUTE NUMBER OF PIXELS ARE MISSING OR CONSTANTLY LIT.
- PLASMAVISION™ IS A WORLDWIDE TRADEMARK OF FUJITSU GENERAL LIMITED AND IS A REGISTERED TRADEMARK IN JAPAN, USA AND OTHER COUNTRIES OR AREAS.
- SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE FOR FURTHER IMPROVEMENT.

*PLEASE NOTE: THE P42VHA30 IS NOT EQUIPPED WITH VIDEO CONNECTORS. VIDEO CONNECTORS AND FUNCTIONALITY ARE ONLY AVAILABLE IF THE OPTIONAL VIDEOBOARD P-TE1300 IS ORDERED AND FITTED.

For a world without limits.